
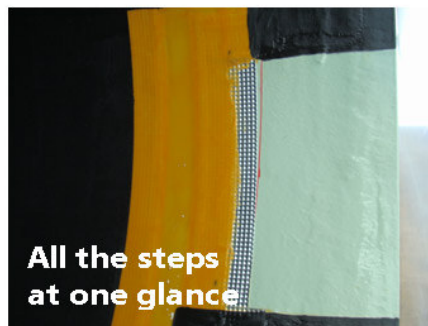
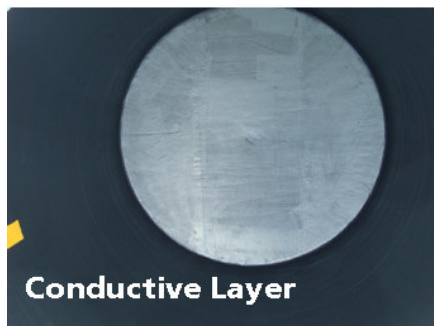
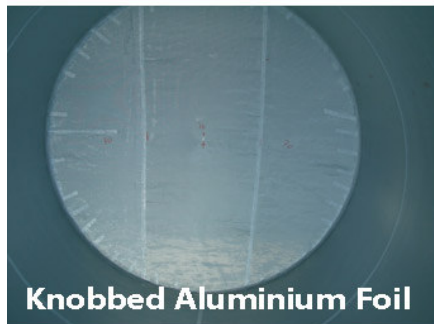


The next Generation Leak Protection Coating System „Duplo“

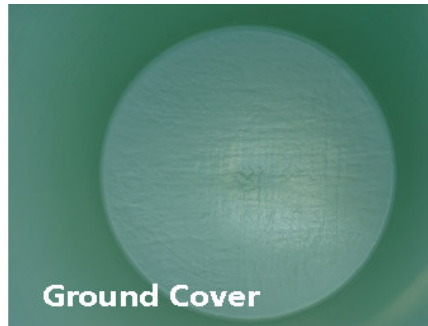

The leak protection coating is most commonly used in single-walled, soil covered, cylindrical tanks as well as with above ground standing tanks.

Through this adaption, the tank reaches security class 1.

The leak protection coating is ideal for storage of water-endangering liquids, such as heating oil, diesel oil, biodiesel, petrol, aviation gasoline, toluol, xylene, alcohols etc.

The high flexibility of leak protection coating can be attributed to the unique calibration of the fiber glass rovings used.

Life expectancy of the leak protection coating was increased, which also helped raise security standards substantially.

In the gap of the leak protection coating, a vacuum is produced. The vacuum is monitored by a manometer.

Even the slightest leak will quickly be detected and prevented.

If you are interested in the leak protection coating, feel free to contact us with any obligations.

For in individual consultation or in case of an emergency, please call us.

**Gewässerschutz-
Systeme Europa**

**Gewässerschutz-Systeme Europa
Neuheim 6
CH 6275 Ballwil**

**Homepage: www.gse-ag.ch
E-Mail: info@gse-ag.ch
Telefon: +41 (0) 41 460 20 53
Telefax: +41 (0) 41 460 30 85
Natel: +41 (0) 79 626 90 35**

